

Use a Phillips or
flat screw driver to
remove these 4
screws



Shown here with
the screws
removed




Twist and pull on the burn cup to release it from the
auger tube and to get the hot rod to one side



Lift the burn cup while keeping the hot rod sleeve to the side of the auger tube.



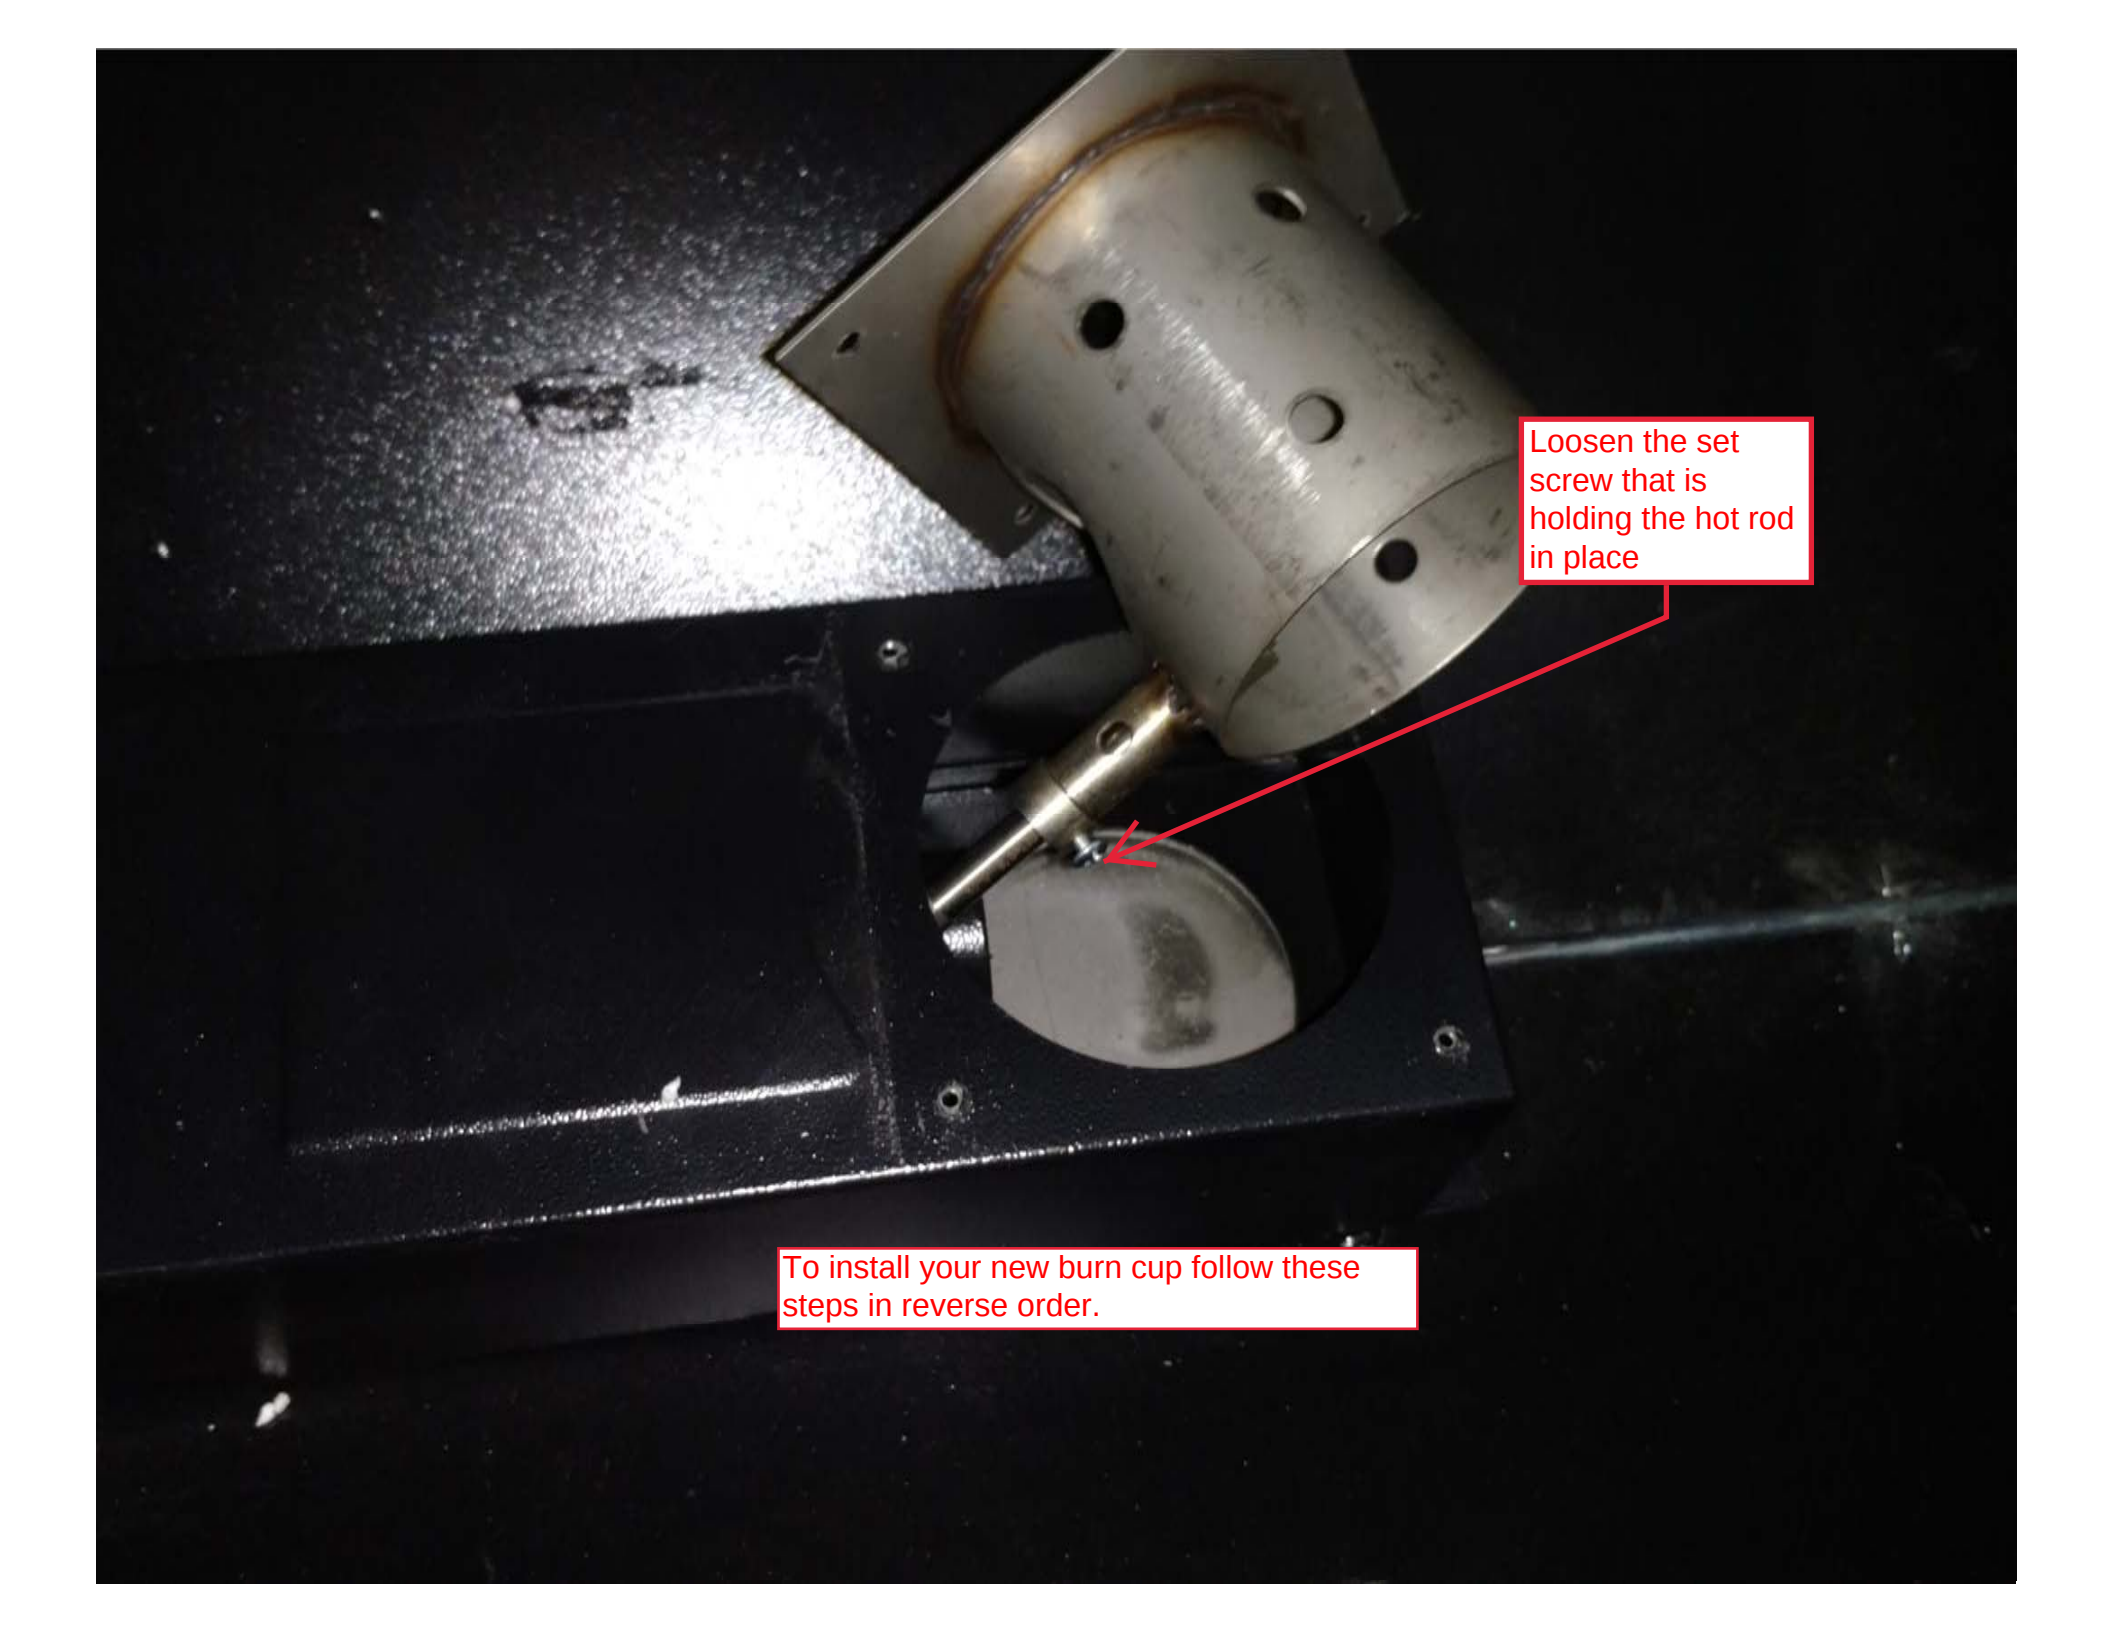

Loosen the set
screw that is
holding the hot rod
in place

To install your new burn cup follow these
steps in reverse order.