

C-OVEN



How to replace the glass window on the stove

PRECAUTION: Please clear as much glass from door frame before proceeding to avoid any injury. We recommend the use of gloves as well.




Using a vacuum, clean away any remaining glass from oven and door. Remove both screws on each side of door

Insert between door panels a flat head screwdriver and gently separate the front oven door panel from back panel.



Maintain a firm grasp on front panel, since that is the piece that will be removed. Once the door panels separate, be careful of remaining glass shards stuck in door panels and glass padding.

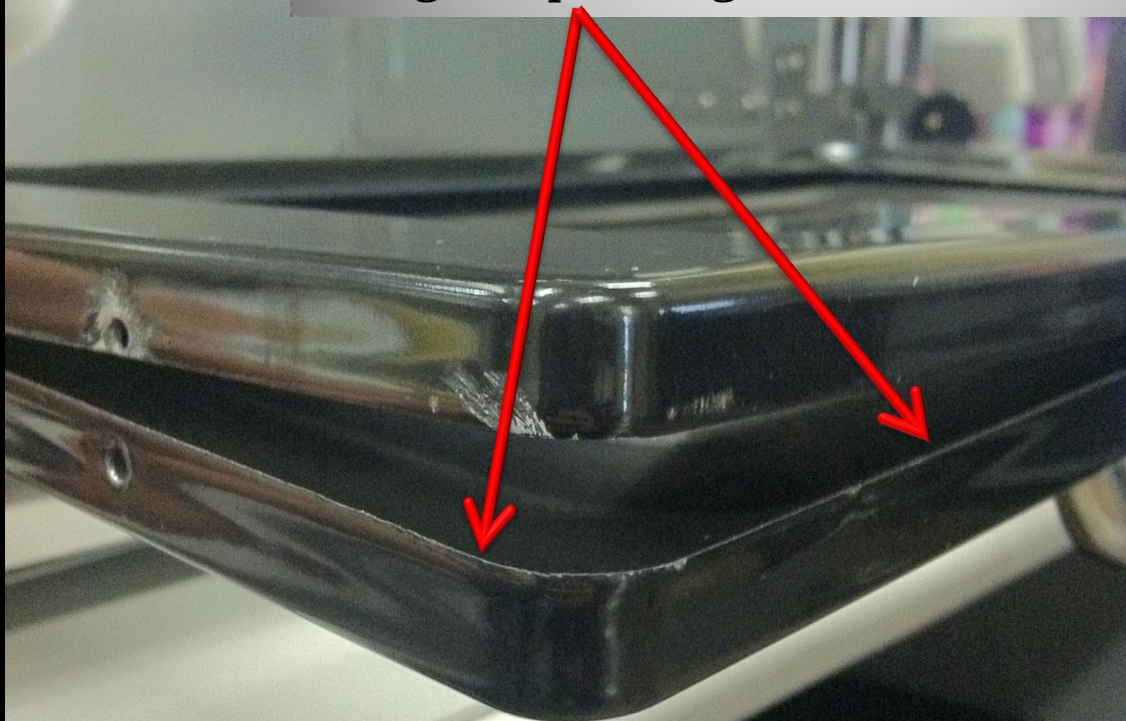

Make sure that any remaining glass shards are cleaned up.

Once front panel is removed, close oven door and lay oven on its back. It may feel a bit uneven do to the gas line cover on the back of the oven, however this will not interfere with the glass replacement.

Align glass padding and glass on oven door.





Reassemble front door. While oven is still on its back, replace front door panel by gently applying pressure. Do not push panels all the way. Once panel is back on, place oven up right. Open oven door and check screw holes alignment. Adjust as necessary to align holes appropriately. Secure door panels with screws.