

How to replace the Blower Motor.

Here is a link to a Youtube video that will help you with this as well:

<https://www.youtube.com/watch?v=NMJKmd0u7uk>



Warning: Before you begin make sure the item is unplugged from the power source.

To Change out the blower motor we are going to want to remove the bottom panel of the hopper.





The easiest way to take the hopper cover off is to take the bottom panel off first. Unscrew the 4 screws on the bottom panel 1 on the front, 2 on the side and 1 on the back. Then drop the bottom panel.



To Change out the blower motor we are going to want to remove the bottom panel of the hopper.


From here we will need to cut the zip tie holding the wires aside. Once you free the wires, you will want to undo the 'C' clasp. This will disconnect it from the controller.

When the bottom panel is removed you can look under and see your blower motor.

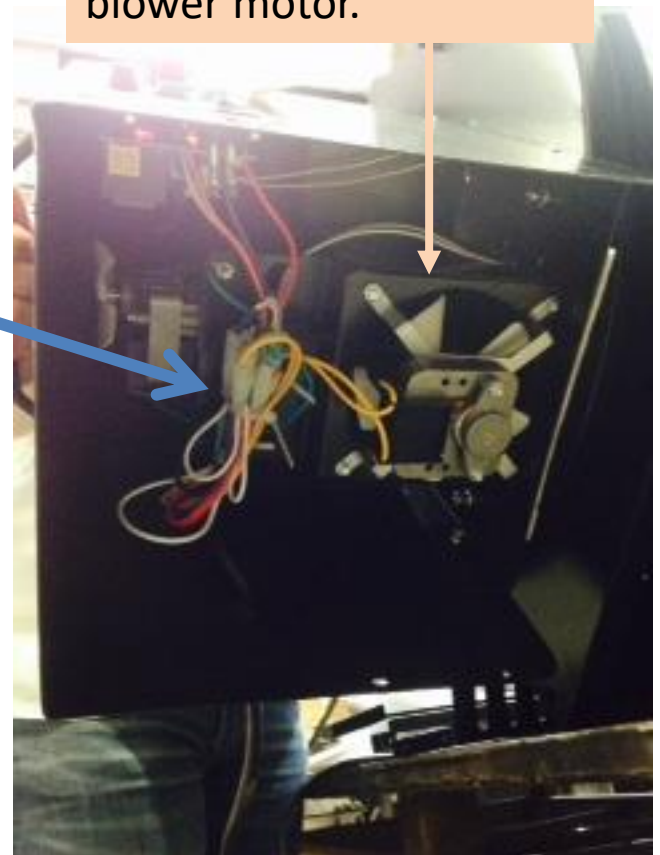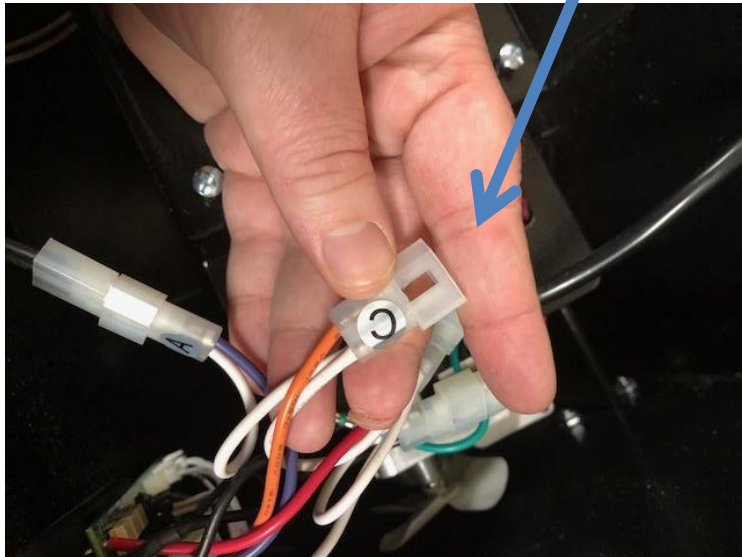

To Change out the blower motor we are going to want to remove the bottom panel of the hopper.

To remove the fan, you would just need to undo the 4 screws that hold it onto the hopper. Once these are removed the fan can be removed and the new one can be put in its place.

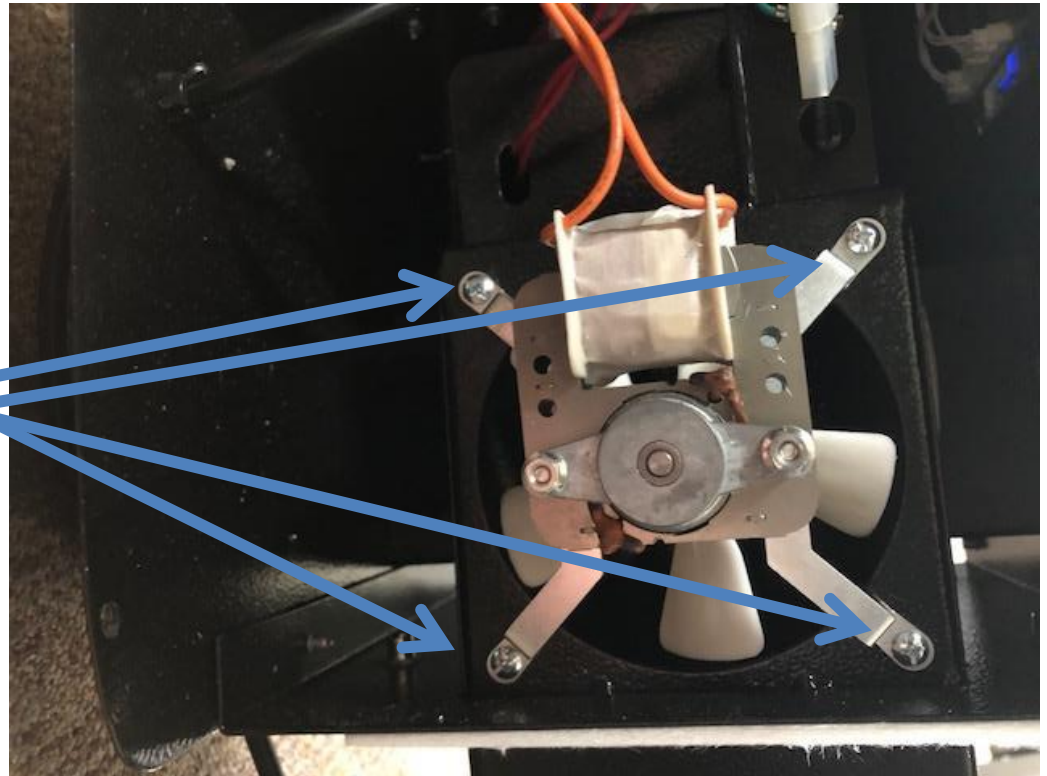

If after troubleshooting with this manual, if you are still experiencing problems, please contact our customer service department. Our agents will be happy to help. You can contact them at
1-800-650-2433

Note: The Manufacturer is not liable for any replacement parts, equipment, and/or injury due to improper installation or modification.